





JUMP STARTER SOS BOOSTER® MICRO 12V-800CA

APPLICATIONS

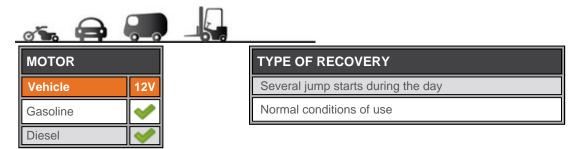

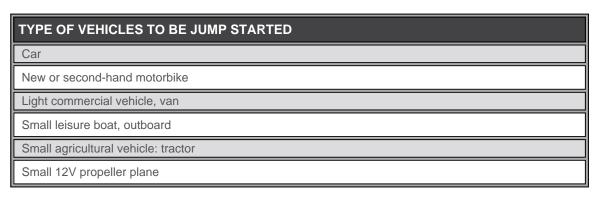


The correct use of a Ceteor Booster cannot cause any damage to the

electronic of a vehicle..

Ceteor booster packs are perfectly compatible with hybrid vehicles.

Diesel motors up to*:







Following the principle "who can do more can do less" our most powerful battery boosters can also be convenient for the applications covered by less powerful battery boosters with same voltage of our range.

Caution:

The circumstances/conditions when starting a vehicle depend of various parameters: vehicle's condition, engine type (petrol or diesel) and power, presence of battery in vehicle or not, temperature, frequency of use ... Those influence the jump start's facility.

Chart for your information - Manufacturer's advice

TECHNICAL SPECIFICATIONS

Reference	861002
Voltage	12V
Cranking Amps	800 A
Peak Amps	2370 A
Nr of batteries	1
Starting cable length	1,30 m
Starting cable diameter	25 mm²
Type of clamps	650 A
Clamps length	190 mm
Clamps opening	35 mm
AC/DC* charger	1,3 A
Cable to charge DC/12V	*
12V Output	16 A
Reverse polarity signal	
Internal fuse	300 A
Connector for auxiliary cables	
Net weight	9,5 kg
Dimensions (cm)	37,5 x 11 x 32
Gross weight	11,5 kg
Packing dimensions (cm)	38 x 14 x 44,5



STANDARD EQUIPMENT



LED CLAMPS

The blue clamp is equipped with a led (lamp) for an easier and safer use, especially in the dark.